



38AF Series

Air Cooled Condensing Unit

Nominal Capacity : 200,000-615,000 Btuh



38AF Series



▲ 38AF020-040



▲ 38AF050-060

High Quality Condensing Units for Diversified Commercial Use

- High operating efficiency
- High system application flexibility
- Electronics control module
- Years of trouble-free operation
- Ozone Friendly refrigerant (R-407C)

Features & benefits

These dependable outdoor sections match Carrier's indoor air handlers and direct-expansion coils for a wide selection of commercial cooling solutions.

Constructed for long life

Models 38AF are designed and built to last. The copper tube-aluminum fin outdoor coil construction provides years of trouble-free operation. (Where conditions require them, copper fin coils are also available.) As option Cabinets are constructed of prepainted galvanized steel, delivering unparalleled protection from surface rust. Inside and outside surfaces are protected to ensure long life, good looks, and corrosion resistance. Solid-state safety controls are used for enhanced system reliability.



Physical Data

Description		Air Cooled Condensing Unit					
Product Model		38AF020	38AF025	38AF030	38AF040	38AF050	38AF060
Nominal Cooling Capacity	W	58,000	82,000	93,000	117,000	161,000	180,000
	Btu/hr.	200,000	280,000	320,000	400,000	550,000	615,000
Power Consumption	W	19,370	26,360	28,360	39,860	52,450	58,050
Power Supply	V/Ph./Hz	380/3/50					
Operating Current	Amp.	44.05	54.84	59.38	85.12	108.68	120.42
Compressor	Model	06E2250611	06E2265611	06E627506	06E6299681	06E2265611	06E627506
	Type	Semi-Hermetic Reciprocating					
	Quantity	1	1	1	1	2	2
Coil	Type	Copper Tube / Aluminium Fin					
	Row	1.5	3	3	3	3	3
	Fin / Inch	15	15	15	15	15	15
	Face Area sq.ft.	42.94	42.94	54.00	54.00	73.23	73.23
Fan Motor	Power Supply V/Ph./Hz	380/3/50					
	Power Output Hp	3/4	2	2	2	2	2
	Power Input W	1,260	2,700			4,030	
	Fan Type	Propeller					
	Drive Type	Direct					
	Fan Diameter inch	28	27	30	30	27	30
	Quantity EA	2	2	2	2	3	3
	Nominal Air Flow CFM	20,000	21,200	23,200	23,200	33,000	33,000
Safety Device	Hi-Pressure Switch psig	395 / 275 (Cut out / Cut in) - Auto Restart type					
	Low-Pressure Switch psig	30 / 60 (Cut out / Cut in) - Auto Restart type					
	Oil-Pressure Switch psig	6 / 14 (Cut out / Cut in) - Auto Restart type					
Capacity Step Control (By Unload)		%	0/50/100	0/66/100	0/66/100	0/33/50/83/100	0/33/50/83/100
Starter		Part Winding					
Electrical Controls		Time Guard Control Module					
Refrigerant	Type	R-407C					
	Pre-Charging from Factory kg.	0.50	0.50	0.50	0.50	0.50	0.50
Piping Connections	Liquid inch	7/8	7/8	7/8	7/8	2.....7/8	2.....7/8
	Suction inch	1 5/8	1 5/8	2 1/8	2 1/8	2.....1 5/8	2.....2 1/8
Weight	lb(kg.)	1,155 (524)	1,286 (583)	1,367 (620)	1,435 (651)	1,950 (885)	2,125 (966)

* RATING CONDITION: OUTDOOR AMBIENT TEMPERATURE 95°F, SATURATED SUCTION TEMPERATURE 45°F

** UNIT SUPPLIED FROM FACTORY ONLY NITROGEN

Unit dimensions

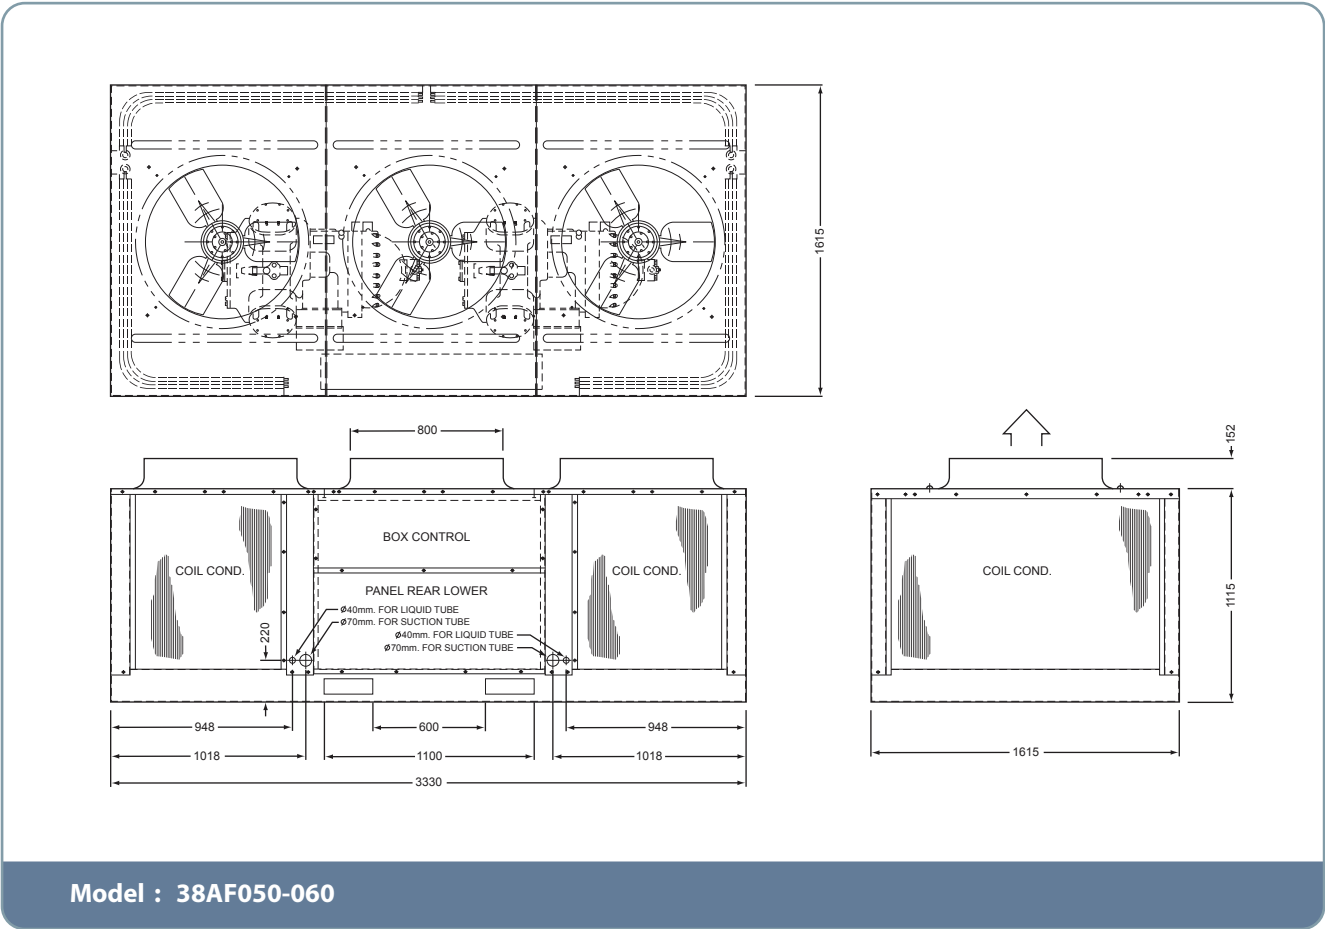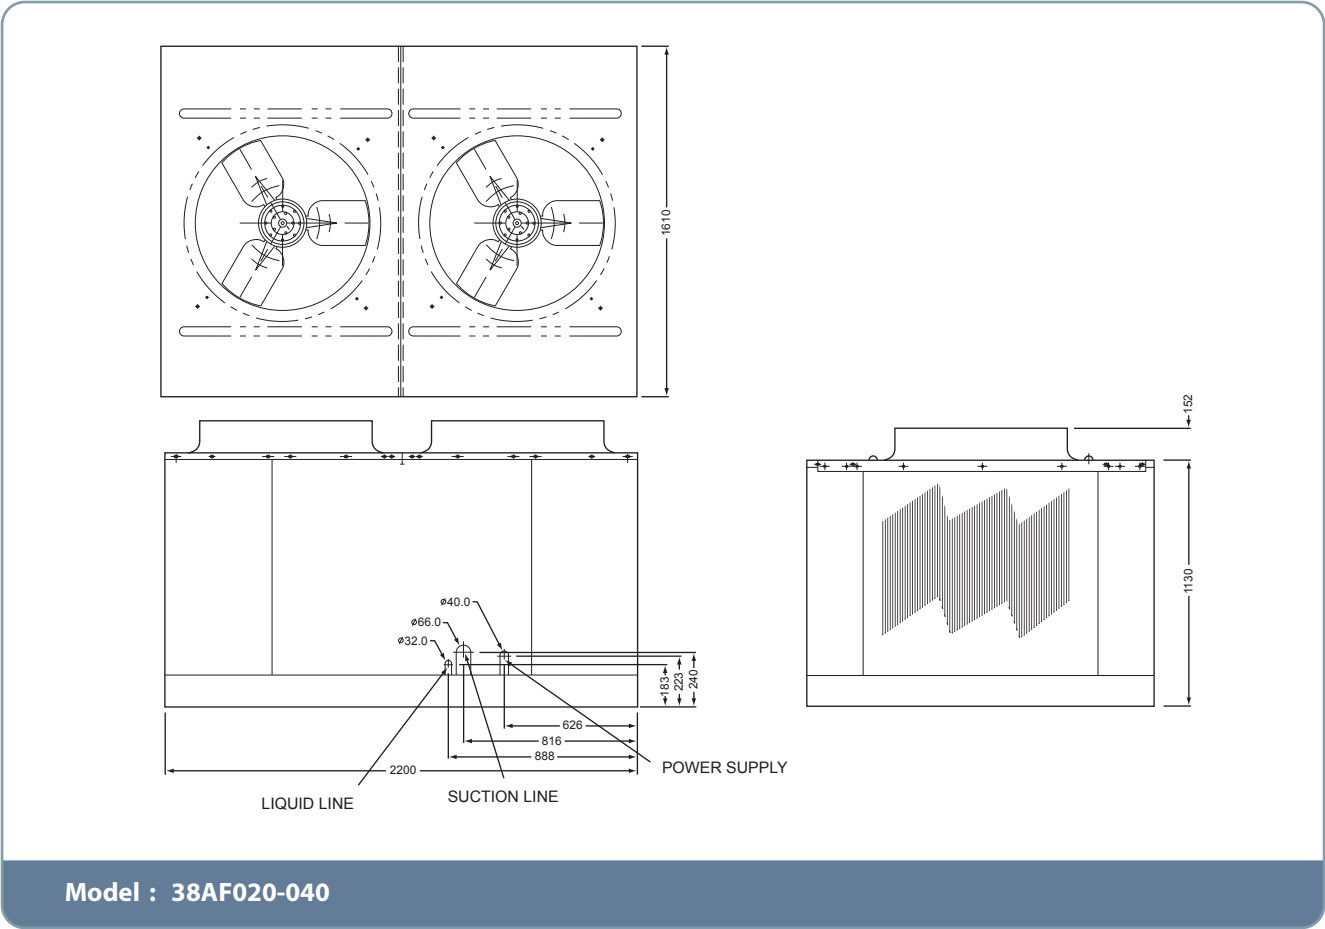



บริษัท แครีเยอร์ (ประเทศไทย) จำกัด
1858/63-74 ชั้น 14, 15
ถ.เทพรัตน กม. 4.5 แขวงบางนาใต้
เขตบางนา กรุงเทพฯ 10260
โทร. 0-2090-9999 แฟกซ์: 0-2751-4778

Carrier (Thailand) Ltd.
1858/63-74 , 14th, 15th Floor,
Debaratna Road, Km.4.5, Bangna Tai,
Bangna Bangkok 10260 Thailand
Tel. 0-2090-9999 Fax: 0-2751-4778

บริษัทฯ ขอสงวนสิทธิ์ที่จะเปลี่ยนแปลงรายละเอียดข้างต้น โดยไม่ต้องแจ้งให้ทราบล่วงหน้า
Carrier reserves the right to make changes in specifications without prior notice.



Carrier
A United Technologies Company



YOUR CARRIER MAN :